


## TF13B(S)A Series

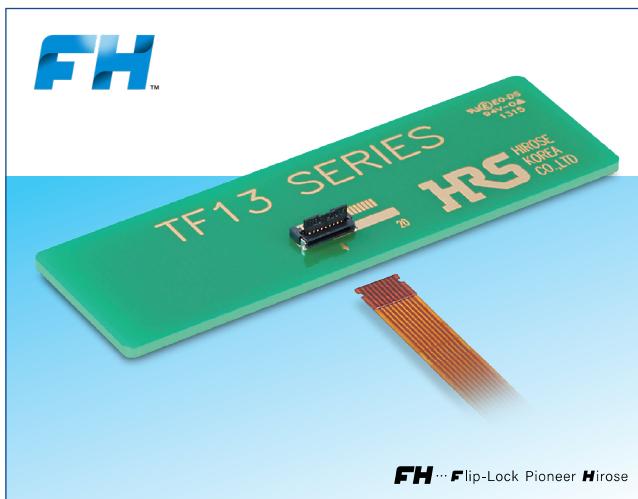

## ■ Features

### 1. Back Flip/Front Axis™

Secures a constant contact gap regardless of actuator operation. The actuator can be closed before FPC/FFC is inserted. (Fig.1)

Furthermore, since the actuator can be delivered and mounted in a closed state, the risk of damage to the actuator is reduced. (Fig.2)

### 2. Prevents actuator from coming off

Each terminal is attached to the actuator, which provides support to the actuator across its entire length. This prevents the actuator from separating from the housing. (Fig.3)

### 3. FPC/FFC side catcher design

The TF13B(S)A Series incorporates Hirose's FPC/FFC side catcher technology. This design feature enables the tabbed FPC/FFC to be placed in the correct position while achieving stability and excellent FPC/FFC retention force.

### 4. Easy FPC/FFC insertion

Tapers on all four sides at the FPC/FFC insertion part enables smooth FPC/FFC insertion.

### 5. Maximizes board space

The bottom surface of the connector is over-molded. This allows the PCB space under the connector to be utilized for additional PCB routing.

### 6. Pick & Place Mounting

Offered in tape and reel packaging that is compatible with automatic machine mounting.

### Back Flip/Front Axis™

A constant contact gap is maintained for actuator opening and closing.

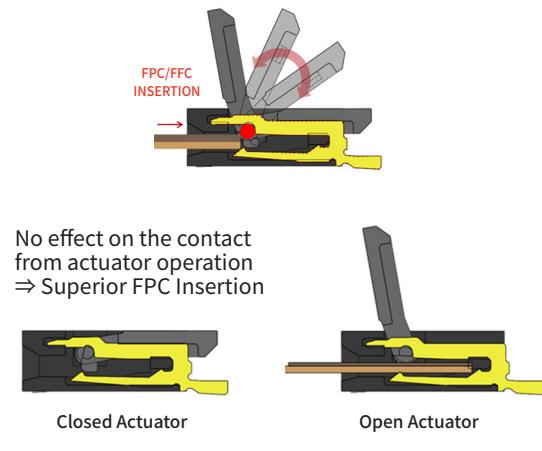


Fig.1

### Back Flip/Front Axis™

#### Actuator Damage Prevention

- Height of Conventional Back Flip and TF13B(S)A Series when stacking in a rack


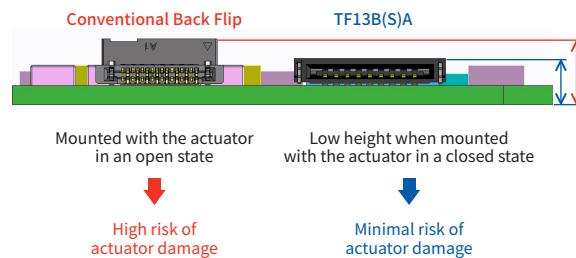



Fig.2

### Prevents Actuator Breakage

#### • Case Part

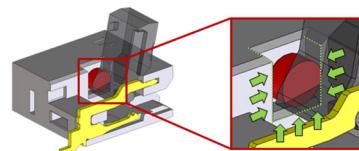

#### • Contact Part

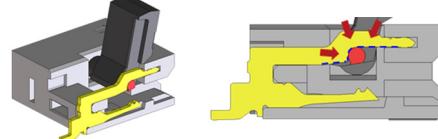

The actuator does not come off during operation.

Алматы (7273)495-231  
Ангарск (3955)60-70-56  
Архангельск (812)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Волгоград (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4962)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петrozavodsk (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

## ■ Product Specifications

Ratings	Rated Current : 0.5A (Note1) Rated Voltage : 50V AC/DC	Operating Temperature : -55 to +85 °C (Note2) Operating Humidity Range : Relative humidity, 90% Max. (No condensation)	Storage Temperature : -10 to +50 °C (Note3) Storage Humidity Range : Relative humidity, 90% Max. (No condensation)
Adaptive FPC/FFC contact specifications	Thickness : 0.2±0.03mm Gold plated contact traces		
Items	Specifications	Conditions	
1. Insulation Resistance	500mΩ Min.	100V DC	
2. Withstanding Voltage	No flashover or insulation breakdown	150V AC rms for 1 min.	
3. Contact Resistance	100mΩ Max. Including FPC/FFC conductor resistance	1mA	
4. Mating Durability (Insertion/withdrawal)	Contact resistance : 100mΩ Max. No damage, cracks, or parts dislocation	20 cycles	
5. Vibration	No electrical discontinuity for more than 1μs Contact resistance : 100mΩ Max. No damage, cracks, or parts dislocation	Frequency : 10 to 55Hz, Half Amplitude 0.75mm for 2hours in 3 axis directions	
6. Shock Resistance	No electrical discontinuity of 1μs or more Contact resistance : 100mΩ Max. No damage, cracks, or parts dislocation	Acceleration : 981m/s², 6ms duration, Sine half-waveform, 3 cycles in each of the 3 axis.	
7. Humidity (Steady State)	Contact resistance : 100mΩ Max. Insulation resistance : 100mΩ Min. No damage, cracks, or parts dislocation	96 hours at a temperature of 40°C and humidity of 90% to 95%	
8. Temperature Cycle	Contact resistance : 100mΩ Max. Insulation resistance : 100mΩ Min. No damage, cracks, or parts dislocation	Temperature : -55 → +15 to +35 → +85 → +15 to +35 °C, Time : 30 → 2 to 3 → 30 → 2 to 3 min. 5 cycles	
9. Resistance to Soldering Heat	No deformation of components affecting performance No abnormality in electrical performance	Reflow : At the recommended temperature profile	

Note 1 : When passing the current through all of the contacts, use 70% of the current rating.

Note 2 : Includes temperature rise caused by current flow.

Note 3 : The term "storage" refers to products stored for long period of time prior to mounting and use.

Operating temperature range and humidity range covers non-conducting condition of installed connectors in storage, shipment or during transportation.

## ■ Material / Finish

Part	Material	Finish	Remarks
Insulator	LCP	Black	UL94V-0
Actuator	LCP	Black	
Contact	Phosphor Bronze	Partially Gold Plated	-----
Retention Tab	Phosphor Bronze	Tin Plated	

## ■ Product Number Structure


Refer to the chart below when determining the product specifications from the product number.  
Please select from the product numbers listed in this catalogue when placing orders.

**TF      13      B(S)A - #S - 0.4      SH      (800)**

① Series Name : TF	⑤ Contact Pitch : 0.4mm
② Series No. : 13	⑥ Terminal Type SH : SMT Horizontal Mounting Type
③ Connector Type : BA : Length = Pitch x (No. of Pos. -1) + 2.2mm BSA : Length = Pitch x (No. of Pos. -1) + 1.8mm	⑦ Specifications (800) : Standard, Emboss tape packaging (5,000pcs/reel)
④ Number of Contacts : TF13BA : 6, 9, 10pos. TF13BSA : 14, 16, 18, 20pos.	

## ■ Dimensions

### ● TF13BA Series

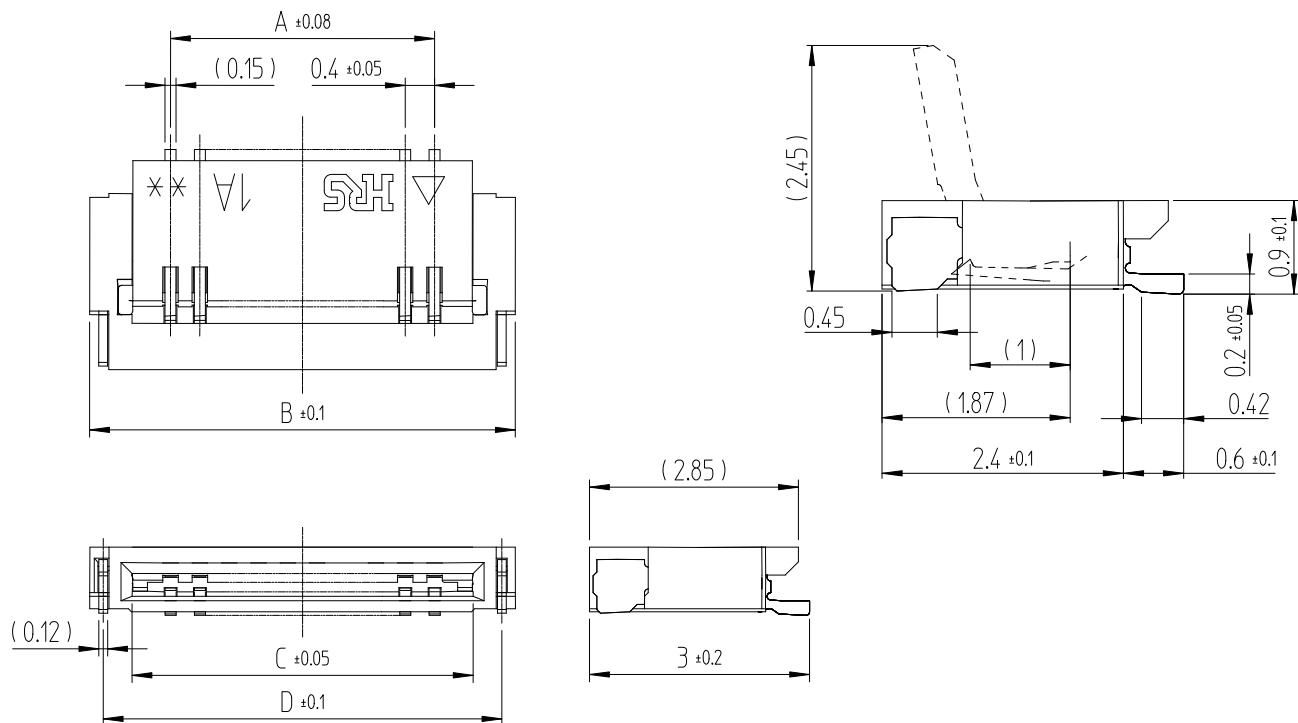

Note 1 : The coplanarity of each terminal lead is within 0.1mm.

Note 2 : This product is packaged and sold by tape and reel. Check the packaging specifications for details.

Note 3 : Sink mark reliefs may be added due to improvements.


Note 4 : Black spots may appear on the mold resin, but this does not affect product performance.

Additionally, the terminal plating may change color after reflow, however this does not represent a quality issue.

Unit : mm

Part No.	HRS No.	No. of Pos.	A	B	C	D	Purchase Unit
TF13BA-6S-0.4SH(800)	480-0340-0 00	6	2.00	4.20	3.05	3.83	
TF13BA-9S-0.4SH(800)	480-0341-0 00	9	3.20	5.40	4.25	5.03	5,000pcs/Reel
TF13BA-10S-0.4SH(800)	480-0495-0 00	10	3.60	5.80	4.65	5.43	

## ● TF13BSA Series

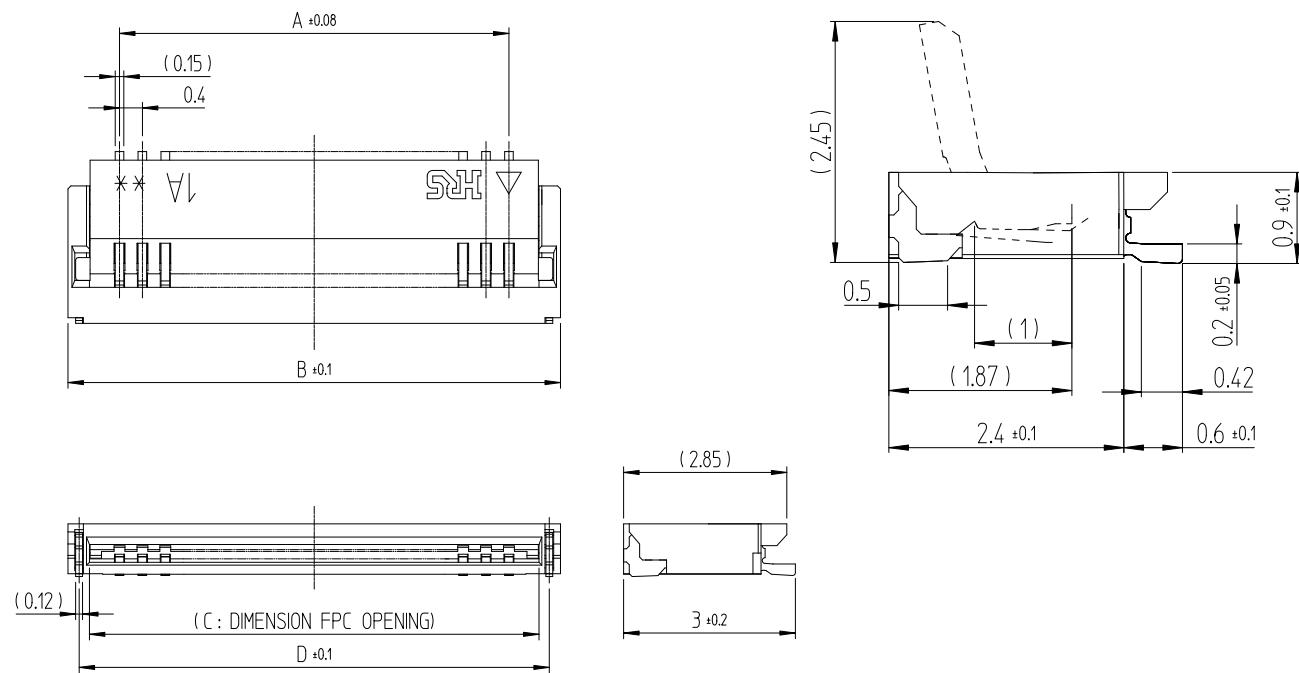

Note 1 : The coplanarity of each terminal lead is within 0.1mm.

Note 2 : This product is packaged and sold by tape and reel. Check the packaging specifications for details.

Note 3 : Sink mark reliefs may be added due to improvements.

Note 4 : Black spots may appear on the mold resin, but this does not affect product performance.


Additionally, the terminal plating may change color after reflow, however this does not represent a quality issue.

Unit : mm


Part No.	HRS No.	No. of Pos.	A	B	C	D	Purchase Unit
TF13BSA-14S-0.4SH(800)	480-0423-0 00	14	5.20	7.00	6.25	6.61	5,000pcs/Reel
TF13BSA-16S-0.4SH(800)	480-0342-0 00	16	6.00	7.80	7.05	7.41	
TF13BSA-18S-0.4SH(800)	480-0343-0 00	18	6.80	8.60	7.85	8.21	
TF13BSA-20S-0.4SH(800)	480-0344-0 00	20	7.60	9.40	8.65	9.01	

## ◆ Recommended Land/Metal Mask Dimensions and FPC/FFC Dimensions

### ● TF13BA Series

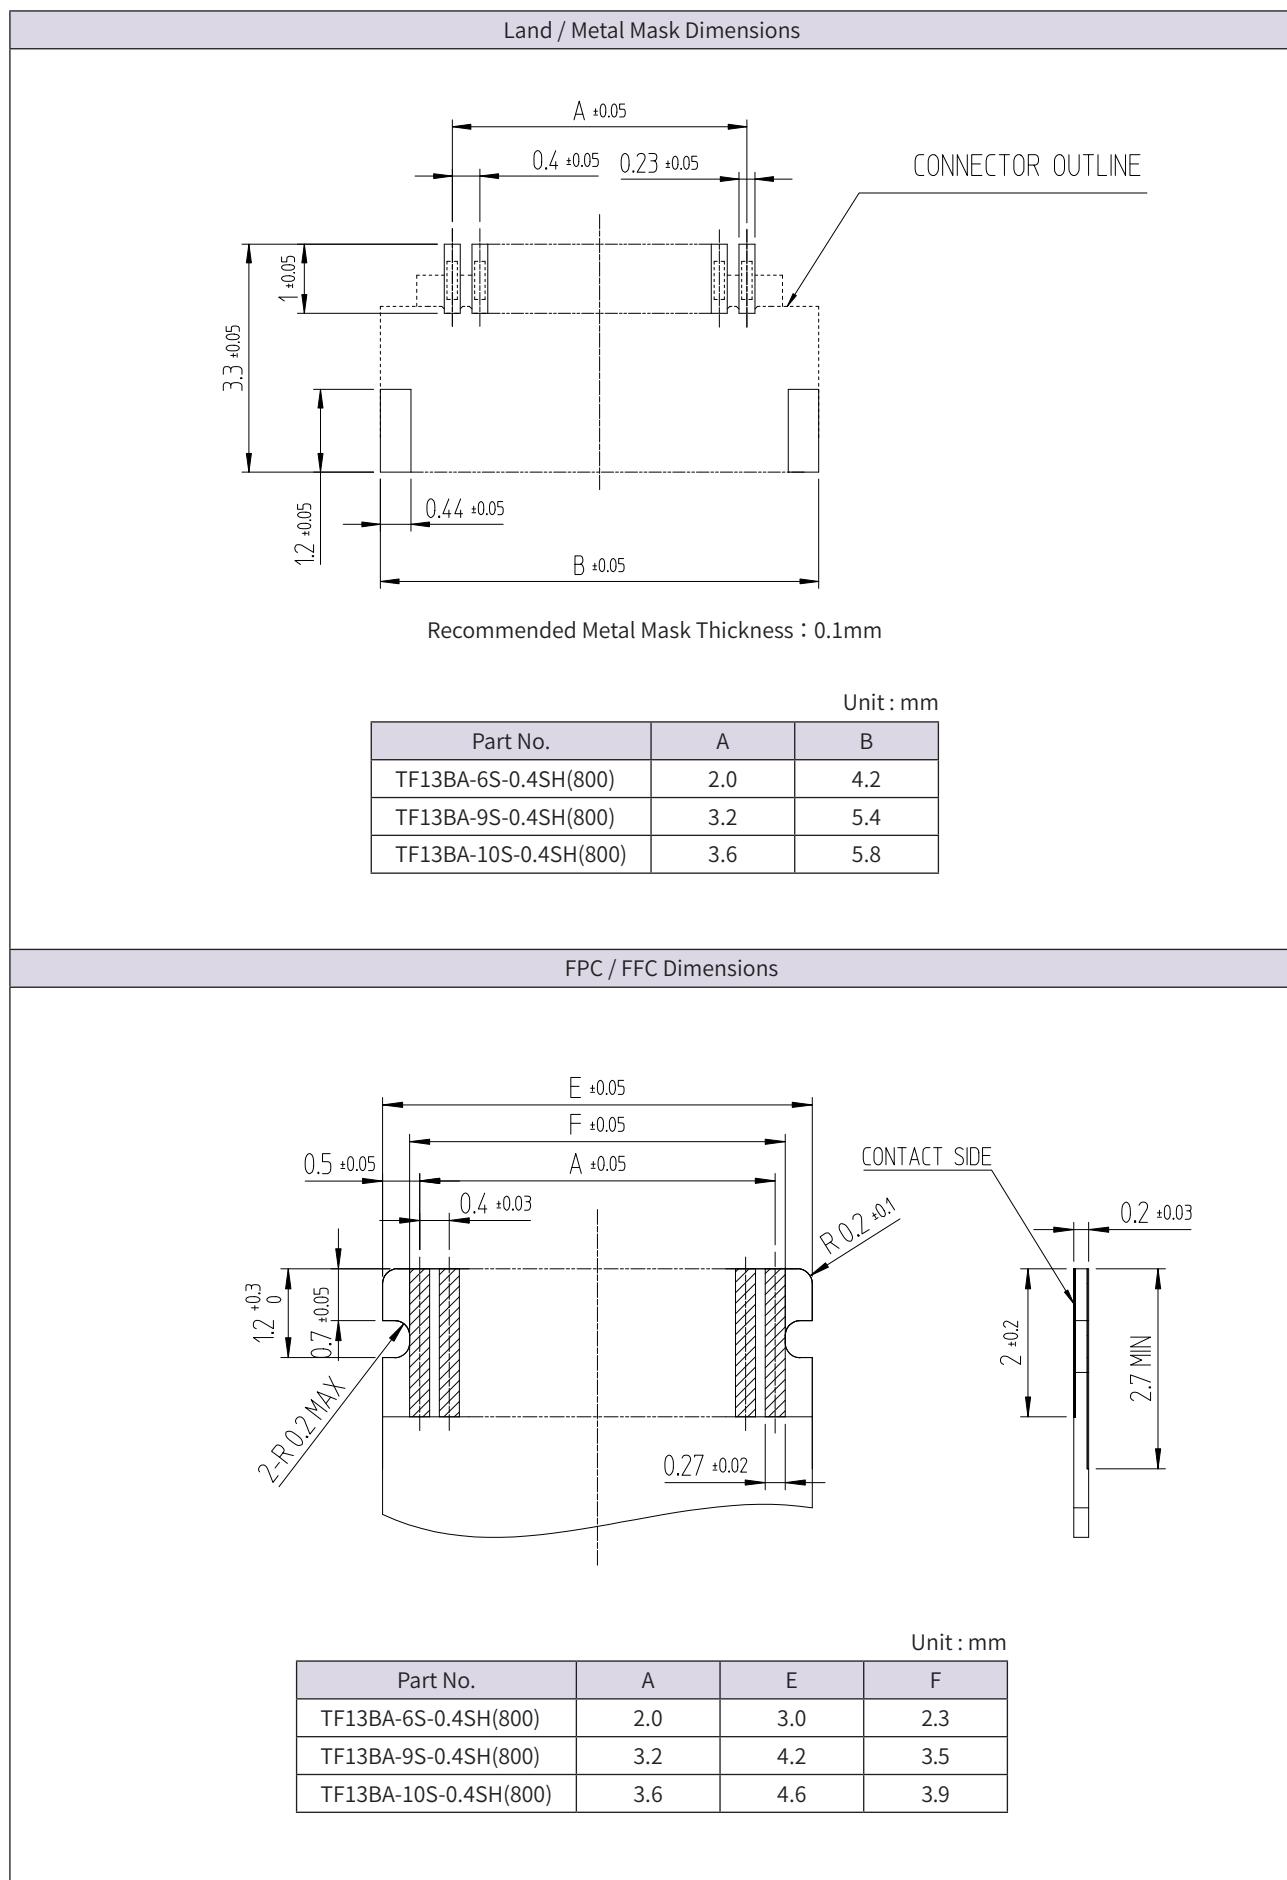


## ● TF13BSA Series


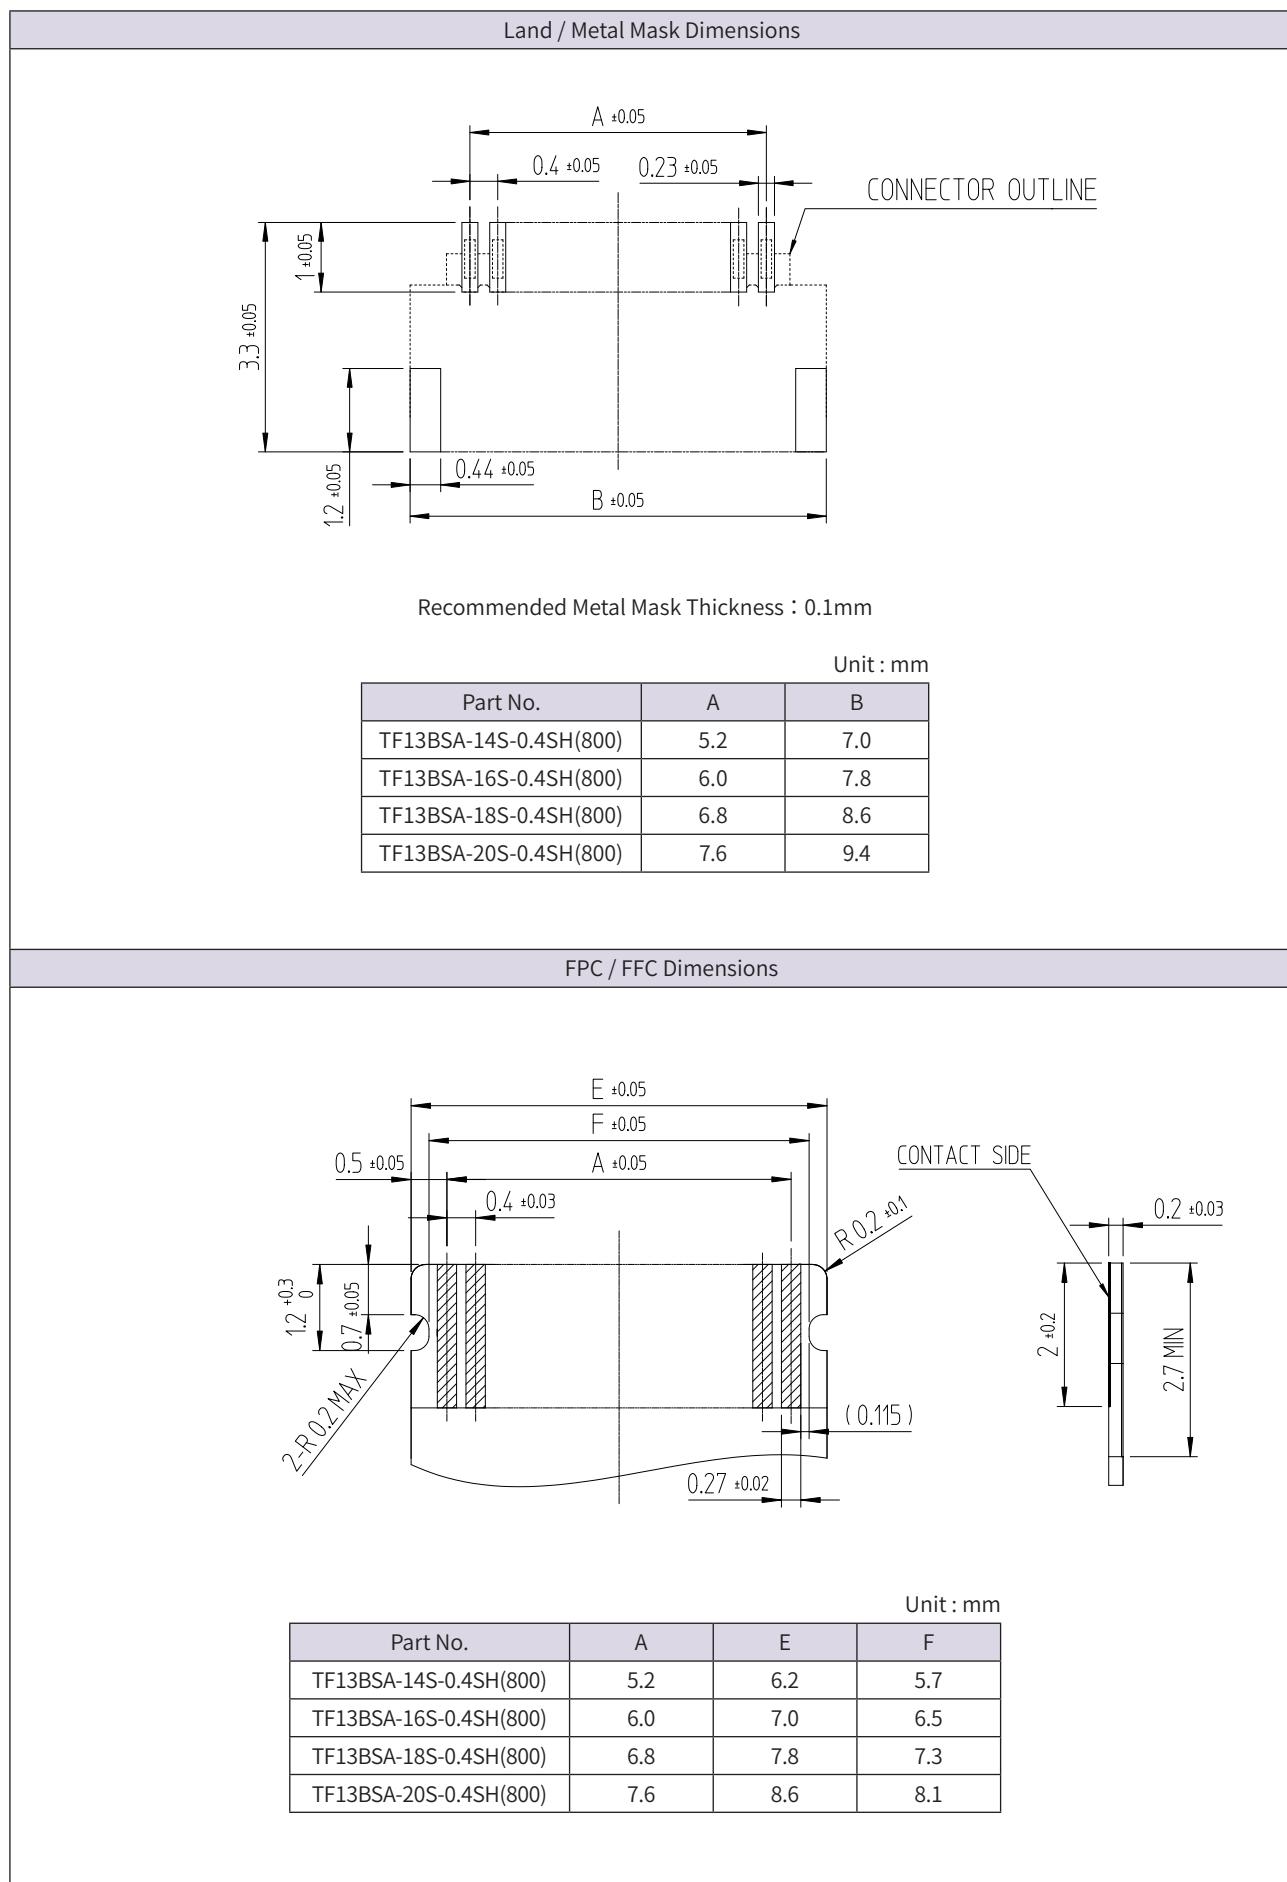


## ◆ Packaging Specification

### ● Embossed Carrier Tape Dimensions

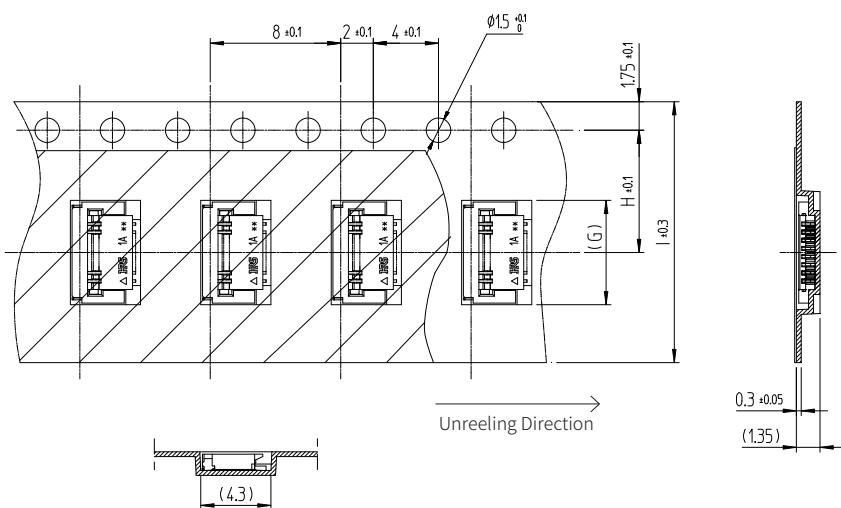

### ● Reel Dimensions

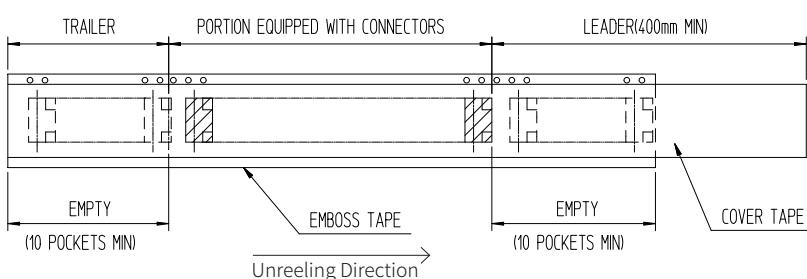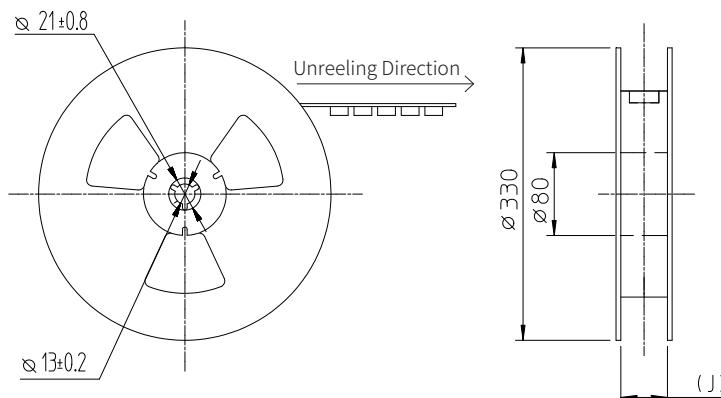

Note 1 : 5,000pcs / Reel (Outer diameter of Reel : Ø330mm)

Note 2 : Material


- 1) Emboss tape : PS (ANTISTATIC TREATMENT)
- 2) Cover tape : PET (ANTISTATIC TREATMENT)

Unit : mm

Part No.	HRS No.	No. of Pos.	G	H	I	J
TF13BA-6S-0.4SH(800)	480-0340-0 00	6	4.4	7.5	16.0	16.5
TF13BA-9S-0.4SH(800)	480-0341-0 00	9	5.6	7.5	16.0	16.5
TF13BA-10S-0.4SH(800)	480-0495-0 00	10	6.0	7.5	16.0	16.5
TF13BSA-14S-0.4SH(800)	480-0423-0 00	14	7.2	7.5	16.0	16.5
TF13BSA-16S-0.4SH(800)	480-0342-0 00	16	8.0	11.5	24.0	24.5
TF13BSA-18S-0.4SH(800)	480-0343-0 00	18	8.8	11.5	24.0	24.5
TF13BSA-20S-0.4SH(800)	480-0344-0 00	20	9.6	11.5	24.0	24.5


## ◆ FPC/FFC Construction (Recommended Specifications)

### ● FPC : Flexible Printed Circuit

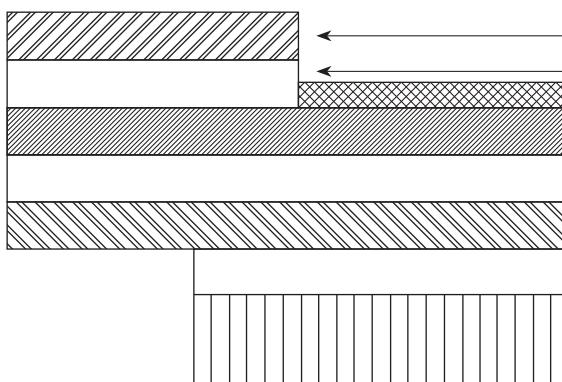

Material Name	Material	Thickness(μm)
Covering layer film	Polyimide	1mil (25)
Cover adhesive		(25)
Surface treatment	Nickel 1 to 5μm + Gold plating 0.2μm	4
Copper foil	CU 1oz	35
Base adhesive	Thermoset adhesive	25
Base film	Polyimide 1mil	25
Reinforcement	Thermoset adhesive	35
Material adhesive		
Stiffener	Polyimide 5mil	75
	Total	199

### ● FFC : Flexible Flat Cable

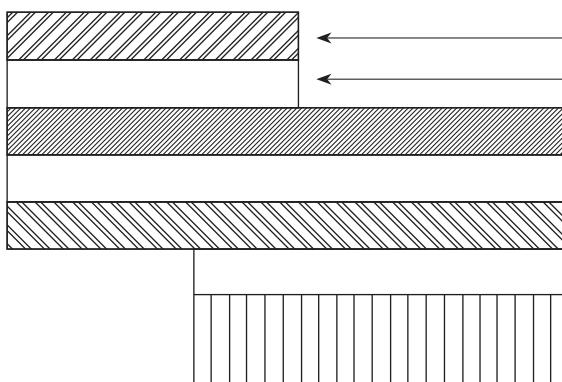


Material Name	Material	Thickness(μm)
Polyester film		(12)
Adhesive	Polyester thermoplastic type	(30)
Annealed copper foil	Gold-plated nickel	35
Adhesive	Polyester type	30
Polyester		12
Adhesive	Polyester type	30
Stiffener	Polyester type	92
	Total	199

Note 1 : The material composition of FPC/FFC is for reference. Please make the thickness of the FPC/FFC mating section  $0.2 \pm 0.03\text{mm}$  in reference to the above FPC/FFC construction.

Note 2 : For details about component configuration, please contact a FPC/FFC manufacturer.

## ◆ Recommended Temperature Profile

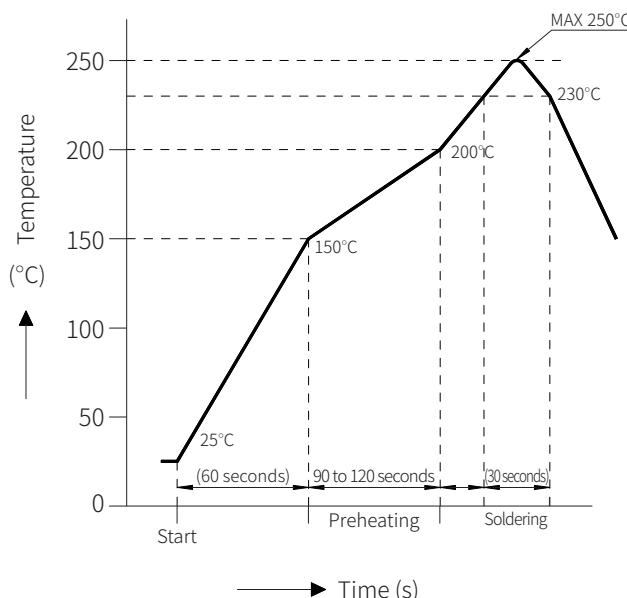

### HRS Test Conditions

Reflow Method : Reflow, IR/hot air

Reflow Environment : Room air

Solder Composition : Paste, 96.5%Sn/3%Ag/0.5%Cu (M705-221CM5-32-10.5 from Senju Metal Industry Co., Ltd.)





Test Board : Glass epoxy 50mm × 25mm × 1mm thick




Land Dimensions : Check the recommended land dimensions for details.



Metal Mask : Check the recommended metal mask dimensions for details.

The temperature profile is based on the above conditions. Please check the mounting conditions before use, conditions such as solder paste types, manufacturer, PCB size and any other soldering materials may alter the performance of such materials.

## ◆ Connector Operation and Precautions

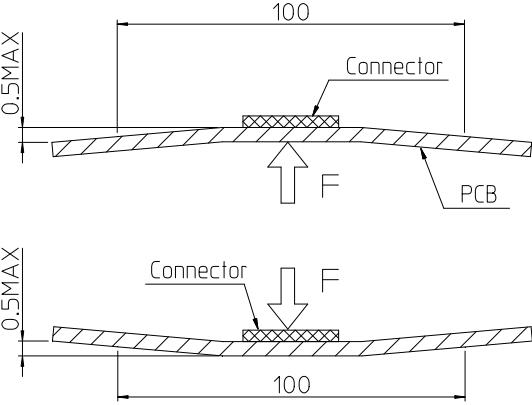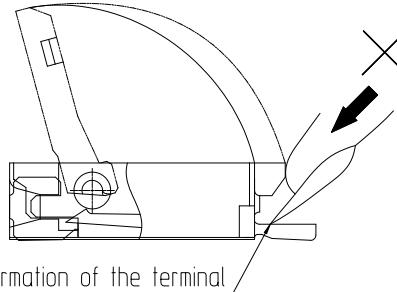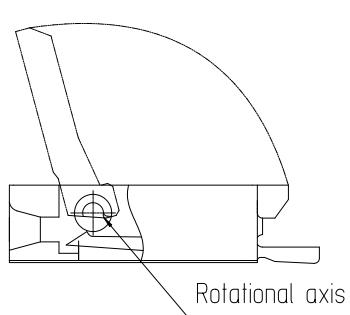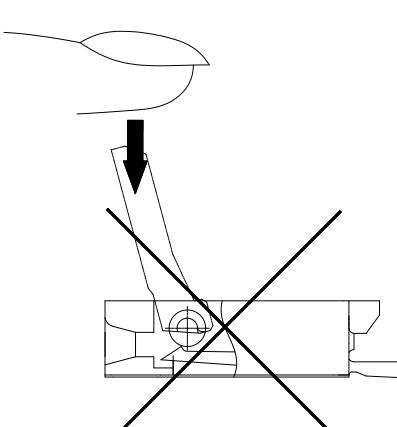Board Mounting Precautions	FPC/FFC Insertion/Mating Precautions
<p><b>● Board Warpage</b> Be sure to minimize the board warpage as much as possible. The lead co-planarity is 0.1mm or less. Excessive board warpage may result in soldering failures or co-planarity issues.</p> <p><b>● Connector Load</b> Do not apply a force of 0.5N or more to the connector before mounting it on the board to prevent connector damage. Do not insert the FPC/FFC or operate the connector before mounting.</p> <p><b>● Board Stress</b><ul style="list-style-type: none"> <li>• Splitting a large board into several pieces</li> <li>• Screwing the board</li> </ul>Avoid the handling described above so that no excessive force is exerted on the board during the assembly process. Otherwise, the connector may become defective.</p> <p><b>● Acceptable Amount of Board Warpage</b> A 100mm wide board has an acceptable warp range of 0.5mm or less. (Below) Excessive amounts of warping will place stress on the connector which may result in damage and malfunction.</p> 	<p><b>● Actuator Operation</b></p> <ol style="list-style-type: none"> <li>1. Do not apply excessive force when releasing the actuator from the initial position (without FPC/FFC inserted). Inserting a nail or finger as shown in the below picture may result in terminal deformation.</li>  <p>Deformation of the terminal</p> <li>2. The actuator rotates around the rotational axis as shown below. Please rotate the actuator.</li>  <p>Rotational axis</p> <li>3. Please do not push the actuator downwards with a force of 0.5N or more as shown below. Otherwise, the actuator may fall off or be damaged.</li>  </ol>

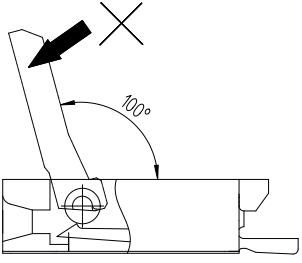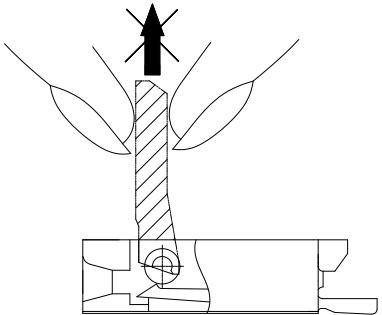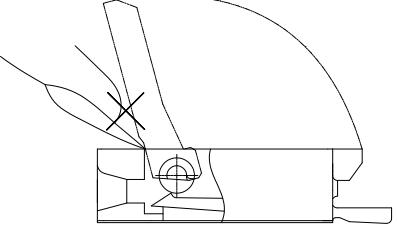FPC/FFC Insertion/Mating Precautions	FPC/FFC Insertion/Mating Precautions
<p>4. The actuator is not designed to open more than 100°. Do not apply any force to open it beyond this point. Doing so may result in actuator damage or breakage.</p> 	<p><b>● Inserting the FPC/FFC</b></p> <p>1. Insert the FPC/FFC horizontally along the surface and at right angle to the connector. Insert it completely to the end.</p> <p>If the FPC/FFC is incorrectly inserted at a diagonal the conductors may short-circuit due to pitch shift misalignment or the edge of the FPC/FFC may catch in the terminals resulting in deformation of the terminal deformation. This connector has a ZIF structure and its effective mating length is 1.87mm.</p> <p>(when the recommended FPC/FFC nominal is used) Use the actuator carefully to prevent the FPC/FFC from Shifting after insertion.</p>
<p>5. Operate the actuator towards the center. It may break if operated on one side of the actuator with FPC/FFC inserted.</p> <p>6. Do not pull or pick the actuator to lift it as shown below. Failure to do so may result in connector breakage. (Do not carry out any operation other than rotating the actuator as shown in 2 on the previous page.)</p> 	<p>2. Do not insert the FPC/FFC diagonally from above If the FPC/FFC is incorrectly inserted at a diagonal as shown in the above FPC/FFC insertion process. The FPC/FFC may be bent, resulting in pattern breakage or insufficient FPC/FFC insertion which may cause conduction failure.</p>
<p><b>● Contact Orientation</b></p> <p>This connector utilizes bottom contacts. Insert the FPC/FFC with the exposed conductors face down.</p> 	<ul style="list-style-type: none"> <li>Secure sufficient FPC insertion space during layout design to prevent incorrect FPC/FFC insertion. Additionally, if the FPC/FFC is too short it will make insertion difficult so please design an appropriate component layout.</li> <li>Make adjustments with the FPC/FFC manufacturer for bending performance and breakage resistance.</li> </ul> <p><b>● Ensuring a Completed Connection</b></p> <p>After completing the locking operation, check that the actuator is horizontal to the board surface. Do not apply excessive force when the actuator reaches 0°, doing so may damage the terminals. (Allowable force: 1N Max.)</p>

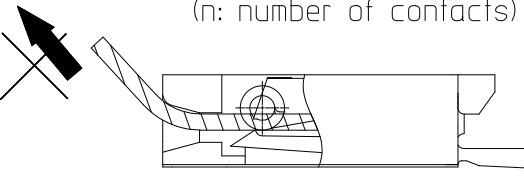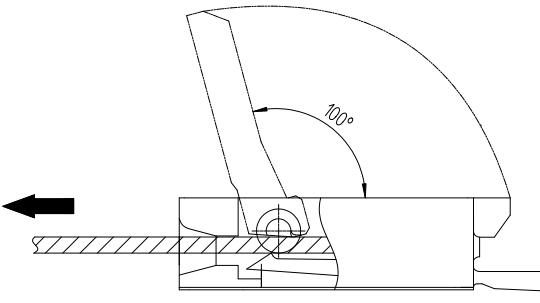Instructions on FPC/FFC Layout after Mating	Other Precautions
<p><b>● Load to FPC/FFC</b></p> <p>Do not apply direct force to the connector during FPC/FFC routing. Contact failure, disconnection or breakage may occur when using a FPC/FFC bent near the connector.</p> <p>In general the FPC/FFC should not be bent sharply near the insertion opening. Secure the FPC/FFC when applying a continuous load.</p> <p>Load: <math>0.03(N) \times n</math> MAX (n: number of contacts)</p> 	<p><b>● Manual Soldering</b></p> <p>Follow the instructions listed below when soldering the connector manually during repair work, etc.</p> <ol style="list-style-type: none"> <li>1. Do not perform reflow soldering or manual soldering with the FPC/FFC inserted into the connector.</li> <li>2. Do not overheat the connector. Do not allow the soldering iron to contact any part other than the intended connector leads. Otherwise, the connector may be deformed or melted.</li> <li>3. Do not use excessive solder (or flux) If excessive solder (or flux) is used on the terminals, solder or flux may adhere to the contacts or the rotating parts of the actuator, resulting in poor contact or a rotation failure of the actuator.</li> </ol>
<p><b>FPC/FFC Removal Precautions</b></p> <p>Release the actuator near the center. The actuator may break if operated at one side with the FPC/FFC inserted.</p> <p>Remove the FPC/FFC with the actuator released.</p> 	

## ◆ While taking in consideration

Specifications mentioned in this catalog are reference values.

When considering to order or use this product, please confirm the "Drawing" and "Product Specifications" sheets.

Use an appropriate cable when using the connector in combination with cables.

If considering usage of a non-specified cable, please contact your sales representative.

If assembly process is done by jigs & tools which are not identified by Hirose assurance will not be given.

If considering usage for below mentioned applications, please contact your sales representative.

In cases where the application will demand a high level of reliability, such as automotive, medical instruments, public infrastructure, aerospace/ defense etc. Hirose must review before assurance of reliability can be given.

## 0.175mm Pitch, 0.65mm Height, Bottom Contact, Double-sided Lead, Back Flip/Front Axis™, FPC Connector

### TF20 Series



#### Compact Size and Easy Mounting

Product : TF20-15S-0.175SHW

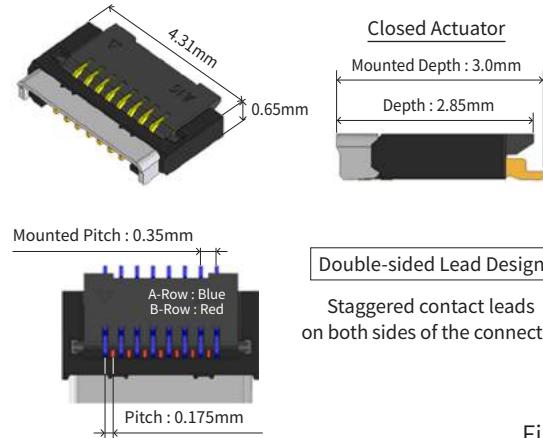


Fig.1

### Features

#### 1. Narrow Pitch, Low Height and Space-saving

Compact size with 0.175mm pitch, 0.65mm height, and 3.0mm mounted depth contribute to high density mounting.

Meanwhile, double-sided lead design provides a 0.35mm mounted pitch and ensures easier mounting. (Fig. 1)

#### 2. High FPC Retention Force & Reliability

FPC side catch design secures connection and enhances reliability. (Fig. 2)

#### 3. Achieve Both Space Reduction and High Durability

Metal shell with retention tabs covers the mating face and achieve high durability against external forces. (Fig. 3)

#### 4. Back Flip / Front Axis™

Secures a constant contact gap regardless of actuator operation. The actuator can be closed before FPC is inserted.

Furthermore, since the actuator can be delivered and mounted in a closed state, workability during inspection and storage after mounting is enhanced.

#### 5. Pick & Place Mounting

Offered in tape and reel packaging that is compatible with automatic machine mounting.

#### 6. Halogen-Free

All materials and substances used to produce this product comply with Halogen-Free standards.

\*As defined by IEC 61249-2-21

Br : 900ppm max., Cl : 900ppm max.,  
Br+Cl : 1,500ppm max.

#### FPC Side Catch Design

Two Protrusions of Actuator and Housing Secure FPC Tab from Upper and Lower Sides

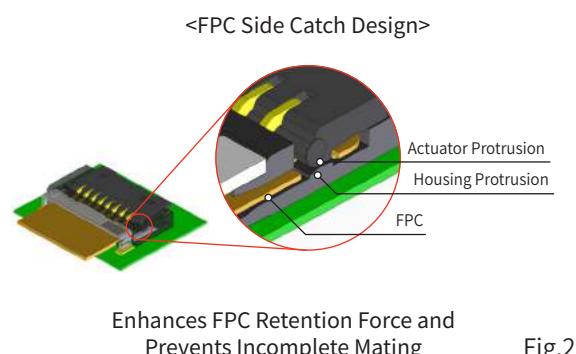



Fig.2

#### High Durability Against External Forces

Metal Shell Integrated with Retention Tabs Covers Mating Face


Case 1

FPC hits the left and right sides of connector  
⇒ Risk of damage to both sides of mating face

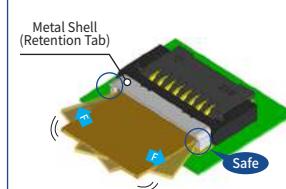

Case 2

FPC is pulled out vertically  
⇒ Risk of damage to upper side of mating face



Enhanced Breaking Strength  
Due to Metal Shell (Retention Tabs)

Fig.3

## ■ Product Specifications

Ratings	Rated Current : 0.15A (Note 1)	Operating Temperature : -55 to +85 °C (Note 2) Operating Humidity Range : Relative humidity 90% Max. (No condensation)	Storage Temperature : -10 to +50 °C (Note 3) Storage Humidity Range : Relative humidity 90% Max. (No condensation)
	Rated Voltage : 30V AC/DC	Adaptive FPC Contact Specifications	
Adaptive FPC Contact Specifications		Thickness : 0.12±0.02mm Gold plated Contact Traces	
Items	Specifications		Conditions
1. Contact Resistance	300mΩ Max. Includes FPC conductor resistance		1mA
2. Insulation Resistance	50MΩ Min.		100V DC
3. Withstanding Voltage	No flashover or insulation breakdown		90V AC for 1 min.
4. Mating Durability (Insertion/withdrawal)	Contact resistance : 300mΩ Max. No damage, cracks, or parts dislocation.		10 cycles
5. Vibration	No electrical discontinuity for more than 1μs. Contact resistance : 300mΩ Max. No damage, cracks, or parts dislocation		Frequency : 10 to 55Hz, Total Amplitude 1.5mm for 2hours in 3 axis directions
6. Shock Resistance	No electrical discontinuity of 1μs or more Contact resistance : 300mΩ Max. No damage, cracks, or parts dislocation.		Acceleration : 981m/s², 6ms duration, Sine half-waveform, 3 cycles in each of the 3 axis.
7. Humidity (Steady State)	Contact resistance : 300mΩ Max. Insulation resistance : 50MΩ Min. No damage, cracks, or parts dislocation		96 hours at 40°C and humidity of 90% to 95%
8. Temperature Cycle	Contact resistance : 300mΩ Max. Insulation resistance : 50MΩ Min. No damage, cracks, or parts dislocation		Temperature : -55 → +15 to +35 → +85 → +15 to +35 °C Time : 30 → 2 to 3 → 30 → 2 to 3 min. 5 cycles
9. Soldering Heat Resistance	No deformation of components affecting performance No abnormality in electrical performance		Reflow : At the recommended temperature profile

Note 1 : When passing the current through all of the contacts, use 70% of the current rating.

Note 2 : Includes temperature rise caused by current flow.

Note 3 : The term "storage" refers to products stored for long period of time prior to mounting and use.

Operating temperature range and humidity range cover non-conducting condition of installed connectors in storage, shipment or during transportation.

## ■ Material / Finish

Part	Material	Finish	Remarks
Insulator	LCP	Black	UL94V-0
Actuator	PA9T	Black	
Contact	Phosphor Bronze	Partially Gold Plated	
Retention Tab	Phosphor Bronze	Tin Plated	

## ■ Product Number Structure


Refer to the chart below when determining the product specifications from the product number.  
Please select from the product numbers listed in this catalog when placing orders.

**TF 20 - 15S - 0.175 SHW (800)**

① ② ③ ④ ⑤ ⑥

① Series Name : TF	④ Contact Pitch : 0.175mm
② Series No. : 20	⑤ Terminal Type SHW : SMT Horizontal Staggered Array Mounting Type
③ No. of Pos. : 15pos.	⑥ Specifications (800) : Standard, Emboss tape packaging (5,000pcs per reel)

## ■ Connector Dimensions

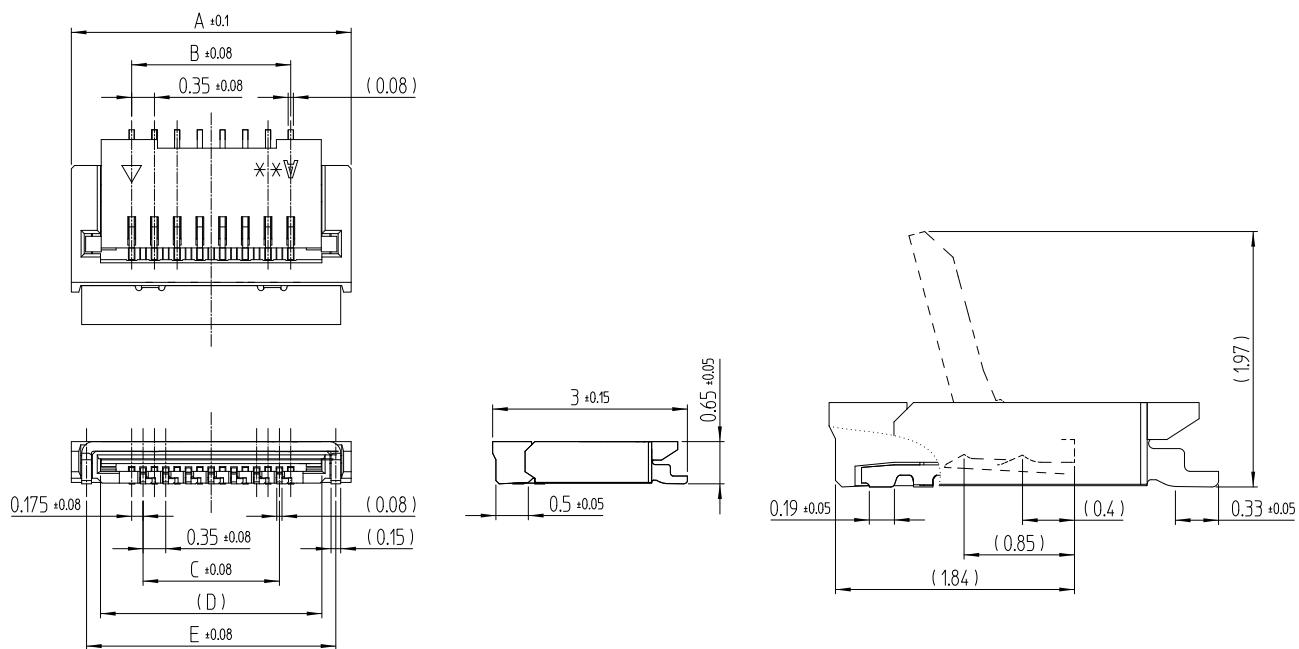

Note 1 : The coplanarity of each terminal lead is within 0.1mm.

Note 2 : This product is packaged and sold in tape and reel. Check the packaging specifications for details.

Note 3 : Sink mark reliefs may be added due to improvements.

Note 4 : Black spots may appear on the mold resin, but this does not affect product performance.

Additionally, the terminal plating may change color after reflow, however this does not represent a quality issue.


Unit : mm

Part No.	HRS No.	No. of Pos.	A	B	C	D	E	Purchase Unit
TF20-9S-0.175SHW(800)	Under Planning	9	3.260	1.40	1.05	2.360	2.790	5,000pcs per reel
TF20-10S-0.175SHW(800)	Under Planning	10	3.435	1.40	1.40	2.535	2.965	
TF20-15S-0.175SHW(800)	CL0480-0801-0-00	15	4.310	2.45	2.10	3.410	3.840	
TF20-16S-0.175SHW(800)	Under Planning	16	4.485	2.45	2.45	3.585	4.015	
TF20-17S-0.175SHW(800)	Under Planning	17	4.660	2.80	2.45	3.760	4.190	
TF20-20S-0.175SHW(800)	Under Planning	20	5.185	3.15	3.15	4.285	4.715	
TF20-22S-0.175SHW(800)	Under Planning	22	5.535	3.50	3.50	4.635	5.065	

Note 5 : Contact positions without HRS No. are currently under planning.

Please contact Hirose for detailed information about product variations.

## ◆ Recommended Land / Metal Mask Dimensions

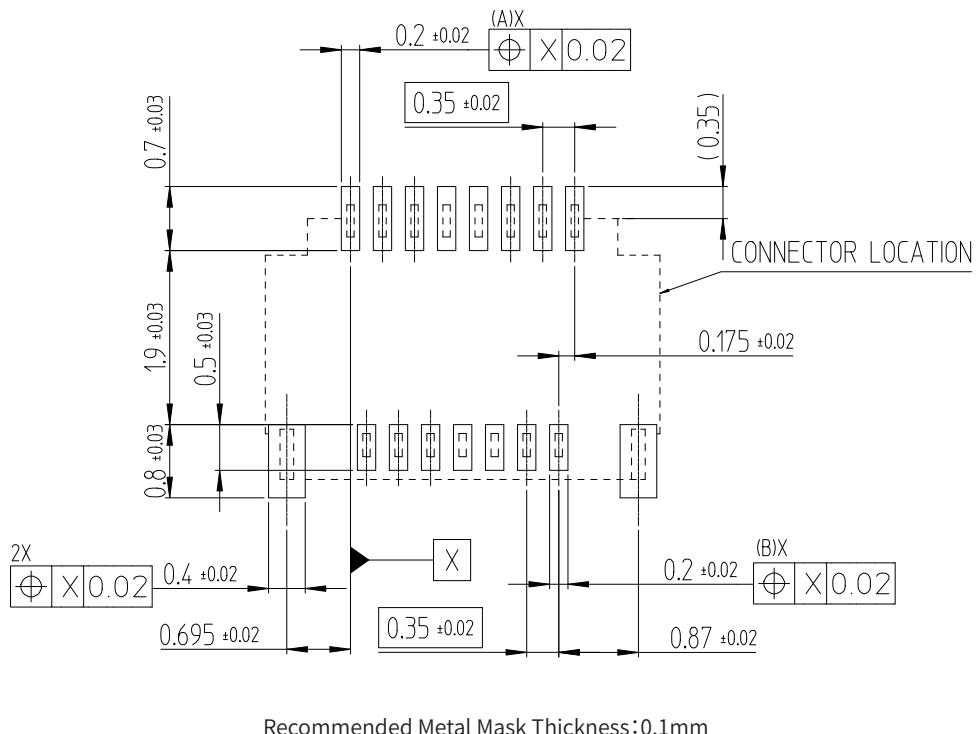

Recommended Metal Mask Thickness: 0.1mm


Part No.	HRS No.	No. of Pos.	A	B
TF20-9S-0.175SHW(800)	Under Planning	9	5	4
TF20-10S-0.175SHW(800)	Under Planning	10	5	5
TF20-15S-0.175SHW(800)	CL0480-0801-0-00	15	8	7
TF20-16S-0.175SHW(800)	Under Planning	16	8	8
TF20-17S-0.175SHW(800)	Under Planning	17	9	8
TF20-20S-0.175SHW(800)	Under Planning	20	10	10
TF20-22S-0.175SHW(800)	Under Planning	22	11	11

Note 1 : Contact positions without HRS No. are currently under planning.

Please contact Hirose for detailed information about product variations.

Note 2 : A and B show number of contacts.

## ◆ Recommended FPC Dimensions

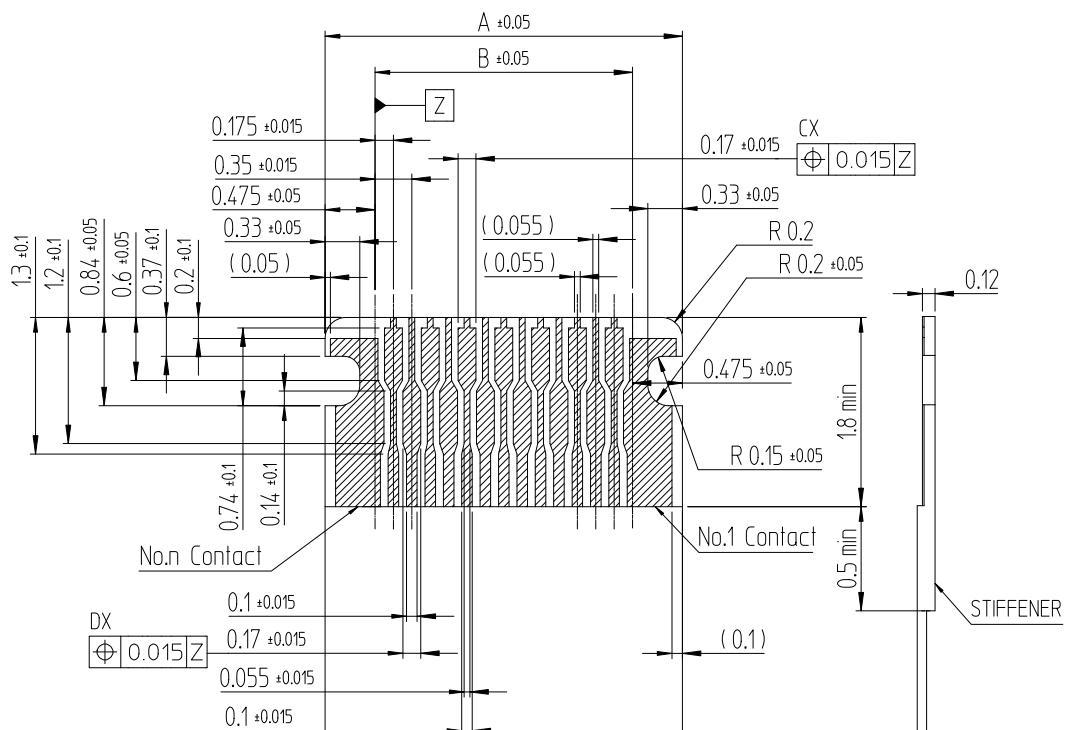

Unit : mm

Part No.	HRS No.	No. of Pos.	A	B	C	D
TF20-9S-0.175SHW(800)	Under Planning	9	2.350	1.400	4	5
TF20-10S-0.175SHW(800)	Under Planning	10	2.525	1.575	5	5
TF20-15S-0.175SHW(800)	CL0480-0801-0-00	15	3.400	2.450	7	8
TF20-16S-0.175SHW(800)	Under Planning	16	3.575	2.625	8	8
TF20-17S-0.175SHW(800)	Under Planning	17	3.750	2.800	8	9
TF20-20S-0.175SHW(800)	Under Planning	20	4.275	3.325	10	10
TF20-22S-0.175SHW(800)	Under Planning	22	4.625	3.675	11	11


Note 1 : Contact positions without HRS No. are currently under planning.

Please contact Hirose for detailed information about product variations.

Note 2 : C and D show number of contacts.

## ◆ FPC Construction (Recommended Specifications)

### ● FPC : Flexible Printed Circuit

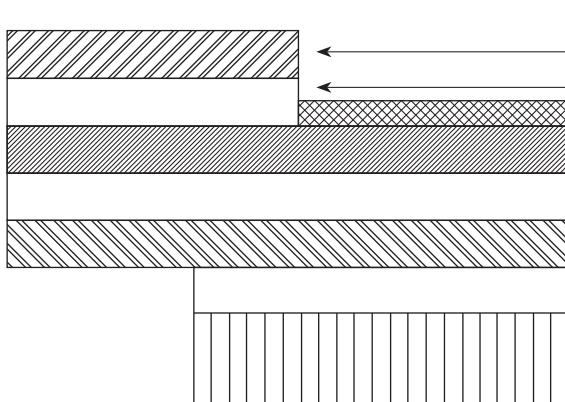


Material Name	Material	Thickness(μm)
Covering layer film	Polyimide	1mil (12.5)
Cover adhesive		(25)
Surface treatment	Nickel 1 to 5μm + Gold plating	4
Copper foil	CU 1/2 oz	18
Base adhesive	Thermoset adhesive	
Base film	Polyimide 1mil	25
Reinforcement material adhesive	Thermoset adhesive	30
Stiffener	Polyimide 5mil	50
	Total	127

NOTE 1 : The material composition of FPC is for reference. Please make the thickness of the FPC mating section  $0.12 \pm 0.02\text{mm}$  in reference to the above FPC construction.


NOTE 2 : For details about component configuration, please contact a FPC manufacturer.

## ◆ Packaging Specifications

### ● Embossed Carrier Tape Dimensions

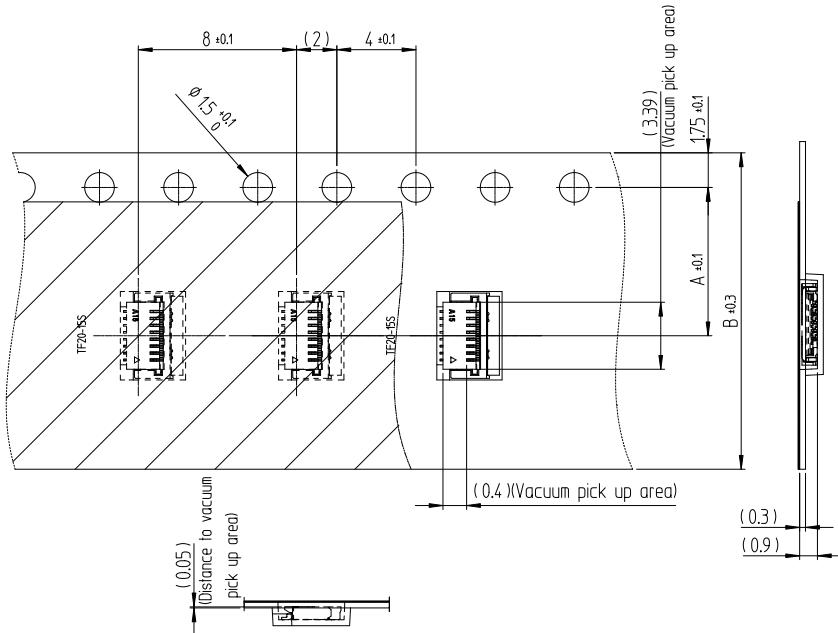

### ● Reel Dimensions

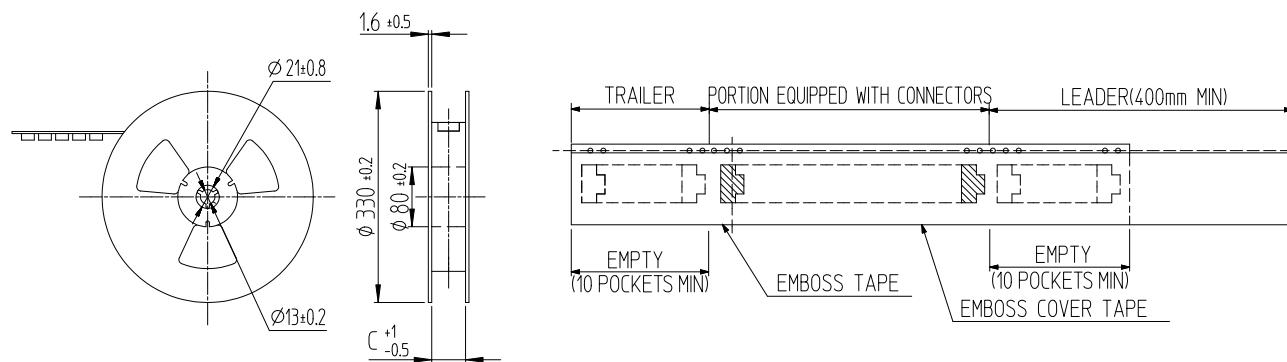

Note 1 : 5,000pcs / Reel (Outer diameter of Reel Ø330mm)

Note 2 : Material

- 1) Emboss tape : PS (Antistatic Treatment)
- 2) Cover tape : PET (Antistatic Treatment)


Unit : mm

Part No.	HRS No.	No. of Pos.	A	B	C
TF20-9S-0.175SHW(800)	Under Planning	9	7.5	16.0	16.5
TF20-10S-0.175SHW(800)	Under Planning	10	7.5	16.0	16.5
TF20-15S-0.175SHW(800)	CL0480-0801-0-00	15	7.5	16.0	16.5
TF20-16S-0.175SHW(800)	Under Planning	16	7.5	16.0	16.5
TF20-17S-0.175SHW(800)	Under Planning	17	7.5	16.0	16.5
TF20-20S-0.175SHW(800)	Under Planning	20	7.5	16.0	16.5
TF20-22S-0.175SHW(800)	Under Planning	22	7.5	16.0	16.5

Note 3 : Contact positions without HRS No. are currently under planning.

Please contact Hirose for detailed information about product variations.

## ◆ Recommended Temperature Profile

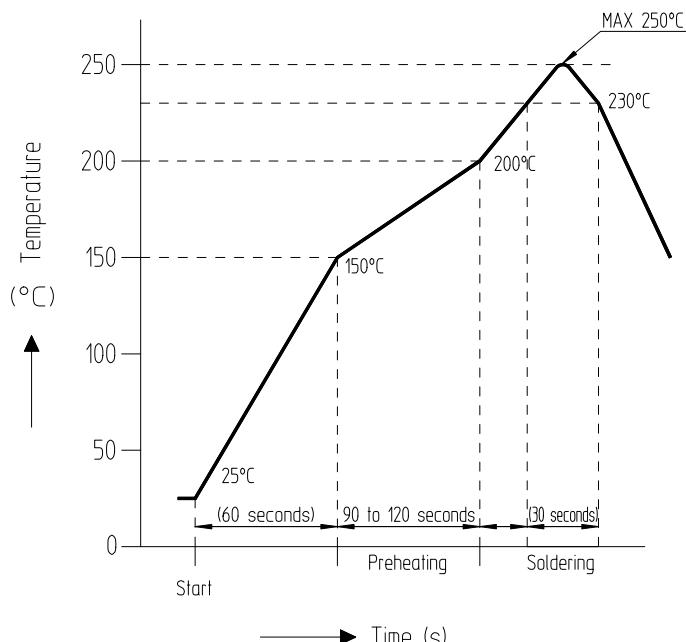

### HRS Test Conditions

Reflow Method : Reflow, IR/hot air

Reflow Environment : Room air

Solder Composition : Paste, 96.5%Sn/3%Ag/0.5%Cu  
(M705-221CM5-32-10.5 from Senju Metal Industry Co., Ltd.)





Test Board : Glass epoxy 50mm × 25mm × 1mm thick





Land Dimensions : Check the recommended land dimensions for details.



Metal Mask : Check the recommended metal mask dimensions for details.

The temperature profile is based on the above conditions. Please check the mounting conditions before use, conditions such as solder paste types, manufacturer, PCB size and any other soldering materials may alter the performance of such materials.

## ◆ Connector Operation and Precautions

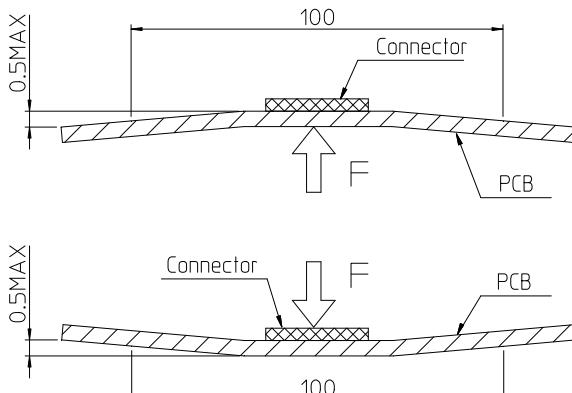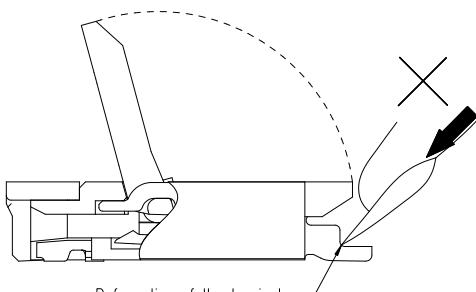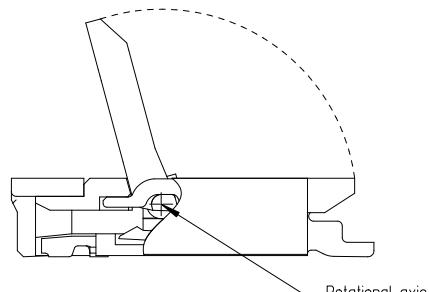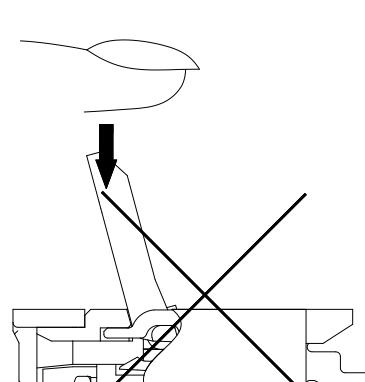Board Mounting Precautions	FPC Insertion and Mating Precautions
<p><b>● Board Warpage</b> Be sure to minimize the board warpage as much as possible. The lead co-planarity is 0.1mm or less. Too much board warpage may result in soldering failures or co-planarity issues.</p> <p><b>● Connector Load</b> Do not apply a force of 0.5N or more to the connector before mounting it on the board in order to prevent connector damage. Do not insert the FPC or operate the connector before mounting.</p> <p><b>● Board Load</b>  <ul style="list-style-type: none"> <li>• Splitting a large board into several pieces</li> <li>• Screwing the board</li> </ul>         Avoid the handling described above so that no excessive force is exerted on the board during the assembly process. Otherwise, the connector may become defective.       </p> <p><b>● Acceptable Amount of Board Warpage</b> A 100mm wide board has an acceptable warp range of 0.5mm or less. (Below) Excessive amounts of warping will place stress on the connector which may result in damage and malfunction.</p> 	<p><b>● Actuator Operation</b></p> <ol style="list-style-type: none"> <li>1. Do not apply excessive force when releasing the actuator from the initial position (without FPC inserted). Inserting a nail or finger as shown in the below picture may result in terminal deformation.</li>  <li>2. The actuator rotates around the rotational axis as shown below. Please rotate the actuator.</li>  <li>3. Please do not push the actuator downwards with a force of 0.3N or more as shown below. Otherwise, the actuator may fall off or be damaged.</li>  </ol>

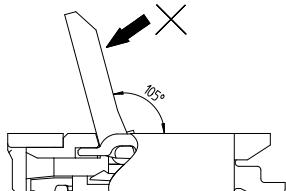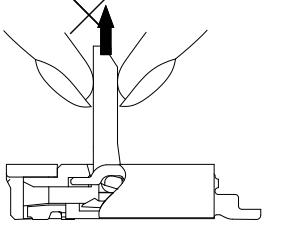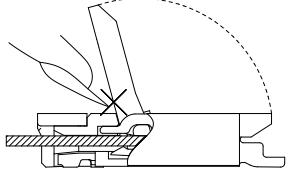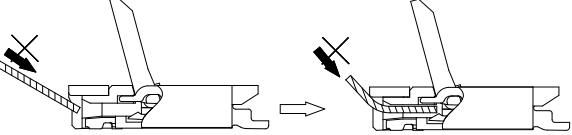FPC Insertion and Mating Precautions	FPC Insertion and Mating Precautions
<p>4. The actuator is not designed to open more than 105°. Do not apply any force to open it beyond this point. Doing so may result in actuator damage or breakage.</p>  <p>5. Operate the actuator towards the center. It may break if operated on one side of the actuator with FPC inserted.</p> <p>6. Do not pull or pick the actuator to lift it as shown below. Failure to do so may result in connector breakage. (Do not carry out any operation other than rotating the actuator as shown in 2 on the previous page.)</p>  	<p><b>● Inserting the FPC</b></p> <p>1. Insert the FPC horizontally along the surface and at right angle to the connector. Insert it completely to the end. If the FPC is incorrectly inserted at a diagonal the conductors may short-circuit due to pitch shift misalignment or the edge of the FPC may catch in the terminals resulting in deformation of the terminal deformation. This connector has a ZIF structure and its effective mating length is 1.87mm. (when the recommended FPC nominal is used) Use the actuator carefully to prevent the FPC from shifting after insertion.</p> <p>2. Do not insert the FPC diagonally from above. If the FPC is incorrectly inserted at a diagonal as shown in the above FPC insertion process, the FPC may be bent, resulting in pattern breakage or insufficient FPC insertion which may cause conduction failure.</p>  <p>• Secure sufficient FPC insertion space during layout design to prevent incorrect FPC insertion. Additionally, if the FPC is too short it will make insertion difficult so please design an appropriate component layout.</p> <p>• Make adjustments with the FPC manufacturer for bending performance and breakage resistance.</p> <p><b>● Ensuring a Completed Connection</b></p> <p>After completing the locking operation, check that the actuator is horizontal to the board surface. Do not apply excessive force when the actuator reaches 0°, doing so may damage the terminals. (Allowable force: 1N Max.)</p>

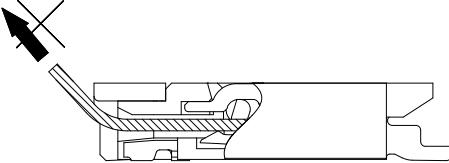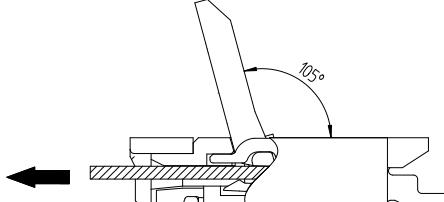Instructions on FPC Layout after Mating	Other Precautions
<p><b>● Load to FPC</b></p> <p>Do not apply direct force to the connector during FPC routing. Contact failure, disconnection or breakage may occur when using a FPC bent near the connector.</p> <p>In general the FPC should not be bent sharply near the insertion opening. Secure the FPC when applying a continuous load.</p> <p>Load: 0.25(N) x n MAX (n: number of contacts)</p> 	<p><b>● Manual Soldering</b></p> <p>Follow the instructions listed below when soldering the connector manually during repair work, etc.</p> <ol style="list-style-type: none"> <li>1. Do not perform reflow soldering or manual soldering with the FPC inserted into the connector.</li> <li>2. Do not overheat the connector. Do not allow the soldering iron to contact any part other than the intended connector leads. Otherwise, the connector may be deformed or melted.</li> <li>3. Do not use excessive solder (or flux). If excessive solder (or flux) is used on the terminals, solder or flux may adhere to the contacts or the rotating parts of the actuator, resulting in poor contact or a rotation failure of the actuator.</li> </ol>
<p><b>FPC Removal Precautions</b></p> <p>Release the actuator at approximately the center. The actuator may break if operated at one side with the FPC inserted.</p> <p>Remove the FPC with the actuator released.</p> 	

## ◆ While Taking into Consideration

Specifications mentioned in this catalog are reference values.

When considering to order or use this product, please review the Drawing and Product Specifications sheets.

Use an appropriate cable when using the connector in combination with cables.

If considering usage of a non-specified cable, please contact your sales representative.

If assembly process is done by jigs & tools which are not identified by Hirose, the warranty of the product may be affected.

If considering usage for below mentioned applications, please contact your sales representative.

In cases where the application will demand a high level of reliability, such as automotive, medical instruments, public infrastructure, aerospace/defense etc. Hirose must review before assurance of reliability can be given.

**Алматы** (7273)495-231

**Ангарск** (3955)60-70-56

**Архангельск** (8182)63-90-72

**Астрахань** (8512)99-46-04

**Барнаул** (3852)73-04-60

**Белгород** (4722)40-23-64

**Благовещенск** (4162)22-76-07

**Брянск** (4832)59-03-52

**Владивосток** (423)249-28-31

**Владикавказ** (8672)28-90-48

**Владимир** (4922)49-43-18

**Волгоград** (844)278-03-48

**Вологда** (8172)26-41-59

**Воронеж** (473)204-51-73

**Екатеринбург** (343)384-55-89

**Иваново** (4932)77-34-06

**Ижевск** (3412)26-03-58

**Иркутск** (395)279-98-46

**Казань** (843)206-01-48

**Калининград** (4012)72-03-81

**Калуга** (4842)92-23-67

**Кемерово** (3842)65-04-62

**Киров** (8332)68-02-04

**Коломна** (4966)23-41-49

**Кострома** (4942)77-07-48

**Краснодар** (861)203-40-90

**Красноярск** (391)204-63-61

**Курск** (4712)77-13-04

**Курган** (3522)50-90-47

**Липецк** (4742)52-20-81

**Магнитогорск** (3519)55-03-13

**Москва** (495)268-04-70

**Мурманск** (8152)59-64-93

**Набережные Челны** (8552)20-53-41

**Нижний Новгород** (831)429-08-12

**Новокузнецк** (3843)20-46-81

**Ноябрьск** (3496)41-32-12

**Новосибирск** (383)227-86-73

**Омск** (3812)21-46-40

**Орел** (4862)44-53-42

**Оренбург** (3532)37-68-04

**Пенза** (8412)22-31-16

**Петrozаводск** (8142)55-98-37

**Псков** (8112)59-10-37

**Пермь** (342)205-81-47

**Ростов-на-Дону** (863)308-18-15

**Рязань** (4912)46-61-64

**Самара** (846)206-03-16

**Санкт-Петербург** (812)309-46-40

**Саратов** (845)249-38-78

**Севастополь** (8692)22-31-93

**Саранск** (8342)22-96-24

**Симферополь** (3652)67-13-56

**Смоленск** (4812)29-41-54

**Сочи** (862)225-72-31

**Ставрополь** (8652)20-65-13

**Сургут** (3462)77-98-35

**Сыктывкар** (8212)25-95-17

**Тамбов** (4752)50-40-97

**Тверь** (4822)63-31-35

**Тольятти** (8482)63-91-07

**Томск** (3822)98-41-53

**Тула** (4872)33-79-87

**Тюмень** (3452)66-21-18

**Ульяновск** (8422)24-23-59

**Улан-Удэ** (3012)59-97-51

**Уфа** (347)229-48-12

**Хабаровск** (4212)92-98-04

**Чебоксары** (8352)28-53-07

**Челябинск** (351)202-03-61

**Череповец** (8202)49-02-64

**Чита** (3022)38-34-83

**Якутск** (4112)23-90-97

**Ярославль** (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(7172)727-132

**Киргизия** +996(312)96-26-47

<https://hirose.nt-rt.ru/> || [hes@nt-rt.ru](mailto:hes@nt-rt.ru)