


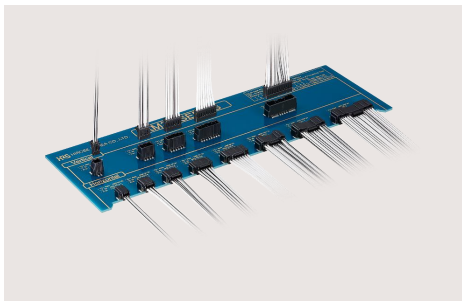


Features

- 1 Space-saving connector (Contact size 0.5mm / 2.0mm pitch)
- 2 Wide Variations
 - Interface Types : Straight / Right angle
 - Single row / Double row
- 3 Meets severe automotive requirements
- 4 Excellent contact retention at a compact size
- 5 High contact reliability with long effective mating length and 2-point contact design
- 6 Safety design with positive lock prevents incomplete mating, mis-insertion and lock damage


Compact Size and Wide Variations

Straight Type

- Single Row
Dimension Example : 8pos.




- Double Row
Dimension Example : 16pos.




Row	Single Row				Double Row			
No. of Pos.	2	3	4	6	8	12	16	24
Dimension A	7.5	-	11.5	15.5	19.5	-	25.3	-

Right Angle Type

- Single Row
Dimension Example : 8pos.



- Double Row
Dimension Example : 24pos.

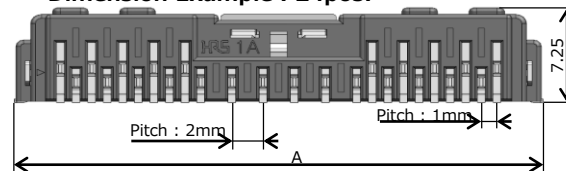

Row	Single Row				Double Row			
No. of Pos.	2	3	4	6	8	12	16	24
Dimension A	7.8	9.8	11.8	15.8	19.8	21.9	25.9	33.9

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Волгодонск (812)26-41-59
Воронеж (473)204-51-73
Катеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (352)50-90-47
Липецк (4742)52-20-81
Россия +7(495)268-04-70

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47
Казakhstan +7(7172)727-132

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35
Киргизия +996(312)96-26-47

Specifications

Rated Current	3A (22 AWG)
Rated Voltage	250V DC
Operating Temperature	-40 to +85°C*
Contact Resistance	Initial : 30mΩ Max. After Testing : 50mΩ Max.
Withstanding Voltage	500V AC for 1 min.
Insulation Resistance	10MΩ Min. (500V DC)
Mating Durability	10 times
Insertion and Removal Force	76N Max.

*Includes the temperature rise due to current flow.

- No. of Pos. : (Straight, Single Row) 2, 4, 6, and 8pos.
(Right Angle, Single Row) 2, 3, 4, 6, and 8pos.
(Straight, Double Row) 16pos.
(Right Angle, Double Row) 12, 16 and 24pos.
- Applicable Cable : 22 AWG

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93