


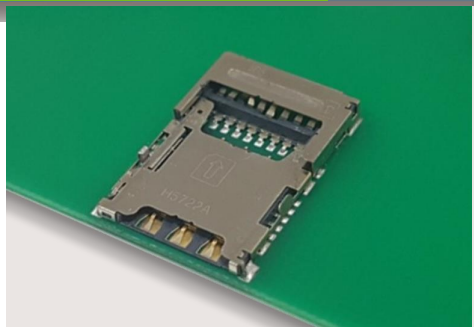


## Features


- 1 Combo socket for nano SIM & micro SD™ cards produces a space saving design  
(Top slot : micro SD card, bottom slot : nano SIM card)
- 2 User friendly card removal design with top and bottom slot
- 3 Easy inspection with exposed contact design
- 4 User-friendly reverse card insertion prevention
- 5 Card detection switch for microSD and nano SIM cards

## Dimensions

Unit : mm

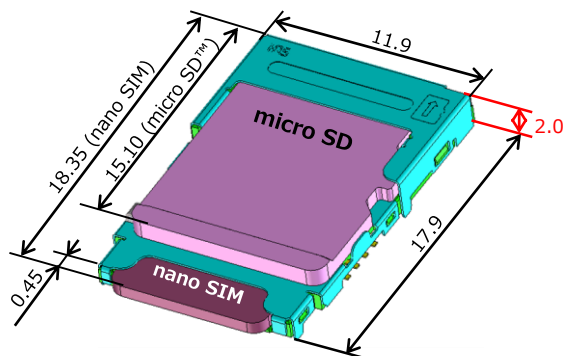


## User friendly card removal design




**micro SD™ removal (Top)**  
To eject micro SD card,  
simply pull out micro SD card

**No need to remove  
battery pack**



**nano SIM removal (Bottom)**  
Easy to eject nano SIM card  
by simply sliding  
eject bar with a finger

**No need to remove  
upper card**

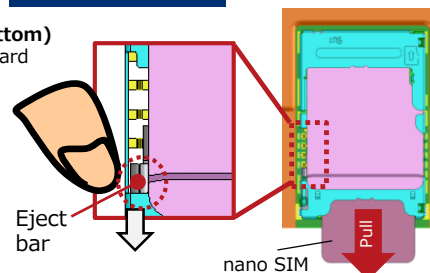

## Specifications

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Contact Resistance    | 100mΩ Max.                                        |
| Withstanding Voltage  | 500V AC for 1 minute                              |
| Mold Resistance       | 1,000MΩ Min. (500V DC)                            |
| Rated Current         | 0.5A                                              |
| Rated Voltage         | 10V AC                                            |
| Operating Temperature | -30℃ to +85℃                                      |
| Mating cycles         | 10,000 times (micro SD)<br>5,000 times (nano Sim) |

• RoHS compliant, Halogen-free product\*

\*This product satisfies halogen free requirements defined as 900ppm maximum chlorine, 900ppm maximum bromine, and 1500ppm maximum total of chlorine and bromine

Алматы (7273)495-231  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (4742)205-81-47


Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70


Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47



## Features

- 1 Easy to remove tray with eject pin
- 2 3 in 2 hybrid design provides various usage patterns.
- 3 Buckling prevention eliminates contact damage
- 4 Enhanced durability with ample eject bar thickness (40N)
- 5 Card detection switch

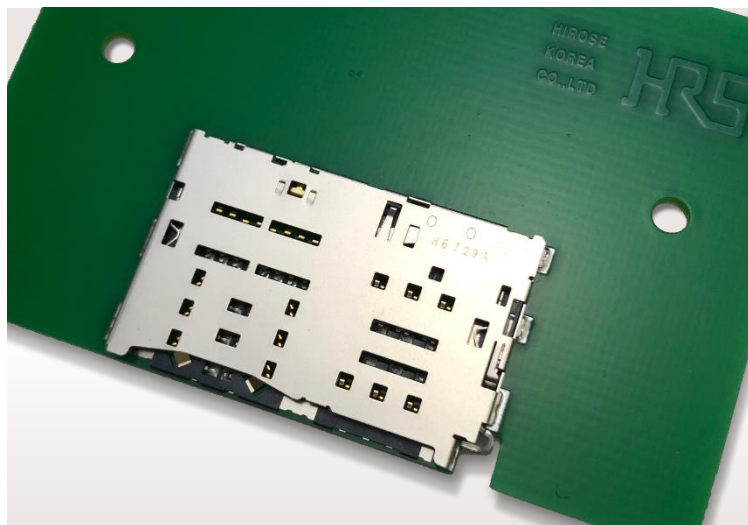


## Dual card use design

### Combo Type

### Dual Sim card Type

micro SD™ + nano SIM


nano SIM×2



⇒ Can be use in 2 cards patterns

\*Note : Tray is not included and should be prepared by customers.

## Buckling prevention design

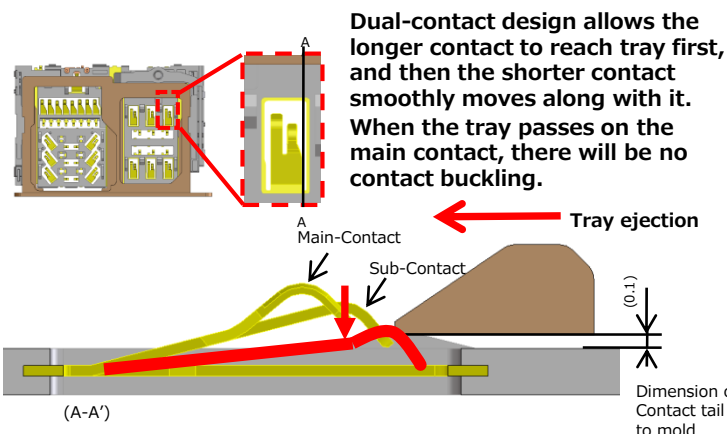

## Specifications

|                       |                       |
|-----------------------|-----------------------|
| Contact Resistance    | 100mΩ Max.            |
| Withstanding Voltage  | 500V AC for 1 minute  |
| Mold Resistance       | 1000MΩ Min. (500V DC) |
| Rated Current         | 0.5A                  |
| Rated Voltage         | 10V AC                |
| Operating Temperature | -30℃ to +85℃          |
| Mating cycles         | 3,000 times           |

• RoHS compliant, Halogen-free product\*

\*This product satisfies halogen free requirements defined as 900ppm maximum chlorine, 900ppm maximum bromine, and 1500ppm maximum total of chlorine and bromine

※ Please contact Hirose's sales representative prior to adopting the products to in-vehicle devices.